


Z-6070

Dual-laser Omnidirectional Scanner

Standard Device

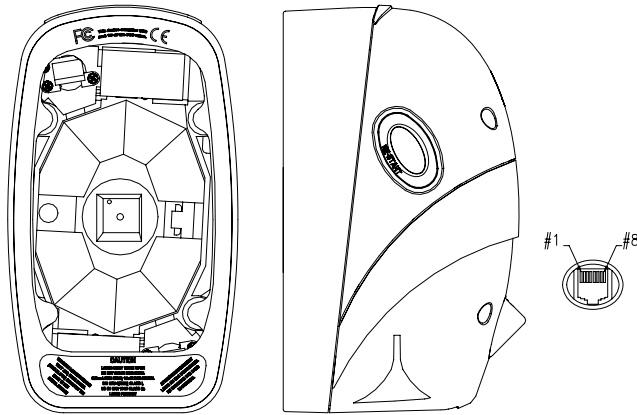

PIN-OUT CONFIGURATION		
Pin	Function	
	Keyboard	RS-232C
1	DC + 5V input	
2	Keyboard Clock	N.C.
3	PC Clock	RTS_CMOS
4	Ground	
5	N.C.	TXD_CMOS
6	N.C.	RXD_CMOS
7	Keyboard Data	N.C.
8	PC Data	CTS_CMOS

Model No.	Part No.	Barcode Symbology	Remark
Z-6070	886-700000-000		Industrial White Color; With Stand
Z-6070 (B)	886-700000-001		IBM Black Color; With Stand
Z-6070	886-70BD00-000		Industrial White Color, Without Stand

Standard Cable Options

1. Keyboard Wedge Cable (for PS/2)

PIN-OUT CONFIGURATION			
5DIN (M)		MINI DIN(F)	
DIN	FUNCTION	DIN	FUNCTION
1.	PC Data	1.	KB Data
2.	N.C.	2.	N.C.
3.	GND	3.	GND
4.	+5V	4.	+5V
5.	PC Clock	5.	KB Clock
6.	N.C.	6.	N.C.

Item Part No. 171-40K105-200

2. RS-232C Cable

DB-9 (F)	FUNCTION
2	TX
3	RX
7	CTS
8	RTS
5	GND

Item Part No. 171-40R425-200

DCE PINOUT

DB-9 (F)	FUNCTION
2	RX
3	TX
7	RTS
8	CTS
5	GND

Item Part No. 171-40R415-200

3. USB Cable

USB Cable

USB TYPE A Connector	Function
1.	VCC
2.	D-
3.	D+
4.	VSS

Item Part No. 171-40U305-200

NOTE:

- DTE: Data terminal equipment
- DCE: Data communication equipment
- Special Order Requirement:
ZEBEX is capable of supplying special cable that is not listed in this guide, given that customers provide detailed pin configurations. In addition, the minimum order quantity of a special cable is 50 pcs.
Length of the cable is 6.5 feet (2 meter).

Optional Accessories

Power Adapter



Part No.	Barcode Symbology	Plug	Output	Applicable Regions
11S-500050-001		UK Plug	5 VDC 1mA	United Kingdom, Scotland
11S-500051-001		US Plug	5VDC 1mA	North America, Japan, Taiwan
11S-500052-001		Australia Plug	5VDC 1mA	Australia
11S-500053-001		European Plug	5VDC 1mA	Europe, China, South East Asia, Middle East, South America