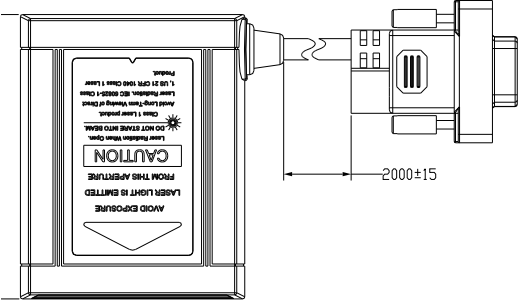




A-52M 2D Image Scan Module

Standard Device



	PIN-OUT CONFIGURATION			
	1	+5V	2	RTS
3	CTS	4	TX	
5	RX	6	D+	
7	D-	8	USB_ENABLE	
9	TRIGGER	10	GND	

Barcode	P/N	Model Name	Remark
	880-5200RP-001	A-52M (R)	Standard device w/RS-232 Cable
	880-5200UB-001	A-52M (U)	Standard device w/USB Cable



Standard Cable Options

- The standard cable is black, straight and 2 meters (6.5 feet) in length.
- The standard cable options are RS-232 and USB.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.

1. RS-232C interface uses detachable cable

DTE Pin-Out 	PIN-OUT CONFIGURATION			
	2.	TX	7.	CTS
3.	RX	8.	RTS	
5.	GND	9	+5V Input	
Item Part No.	170-50R445-200			

2. USB Interface with Type A detachable cable

USB TYPE A 	USB TYPE A CONNECTOR		FUNCTION
	1.		VCC
2.		D-	
3.		D+	
4.		GND	
Item Part No.	170-52U030-200		

Power Adapter

A-52M requires a minimum of 350mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

