


Charging

Notes:


- *When charging the battery for the first time, charge it for at least 12 hours.
- *Battery can also be charged inside the additional charging slot provided by the cradle (optional).

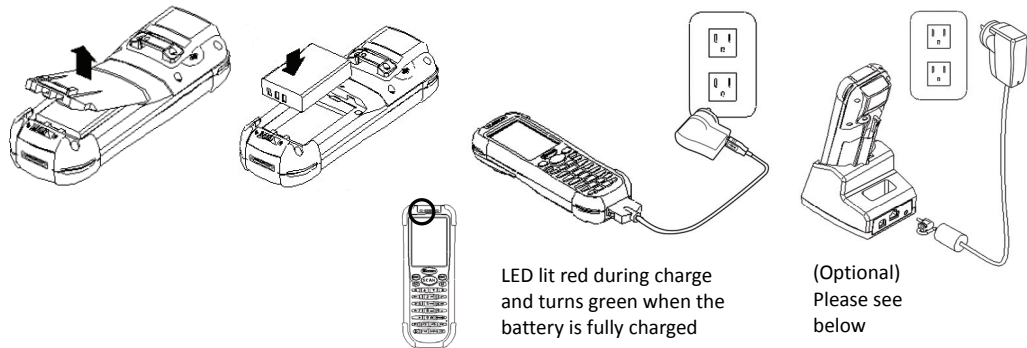

Cradle Connection

To communicate with a PC via cable connection, a cradle must be used to connect to the PC's USB or RS-232 ports. Attach one end of the cable to the USB interface or RS-232 on the cradle and the other to your PC then plug in the power adapter to the cradle.


Cradle LEDs

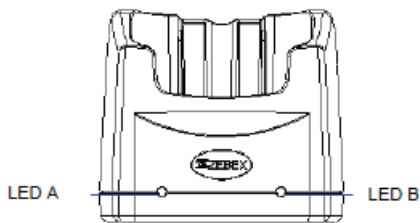



- LED A- The LED lit when the cradle is connected to AC power.
- LED B- The LED shows red when a battery is inserted into the rear battery slot of the cradle for recharge. The LED changes to green when the battery is fully charged.

Quick Start Guide for ZEBEX Z-217X Plus Series

Package Contents

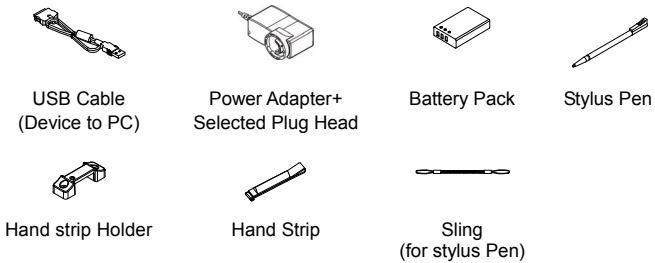

Optional Accessories

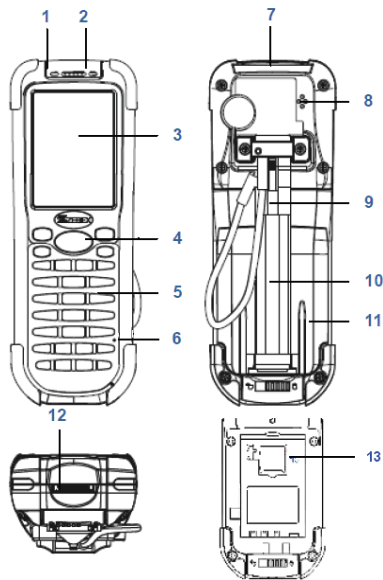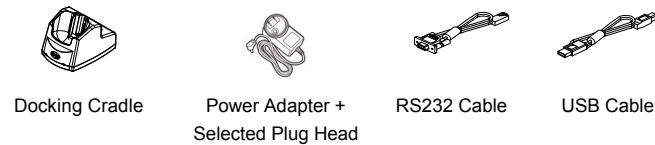


1	LED indicator	Battery charging indicator
2	LED indicator	Green for good read
3	LCD screen	Display various programs
4	Scan button	Barcode reading trigger
5	Keypad	Activate device functions
6	Reset switch	Insert needle to reset
7	Scan windows	Emits laser for barcode reading
8	Buzzer	Outputs confirmation tones
9	Stylus pen	Touch screen operation and RESET needle
10	Hand strip	Protects the Handheld Terminal from dropping.
11	Battery compartment	Main battery inside
12	Communication port	Communication with cradle
13	Expansion Slot	MicroSD expansion slot

Using Barcode Scanner

The Z-217X Plus is a highly versatile tool that can scan a wide range of barcodes but it is imperative that it is used in the correct manner.


To scan a barcode:

1. Hold the Z-217X Plus horizontally and point it directly at the barcode you wish to scan.
2. Once in the correct position, press the SCAN button.
3. An audible alarm is heard and the barcode digits will appear on the LCD screen if the scan is successful.

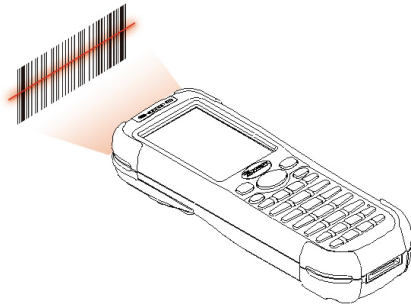


Volume Control

To set the volume, go to Control Panel and click on Volume and Sound.

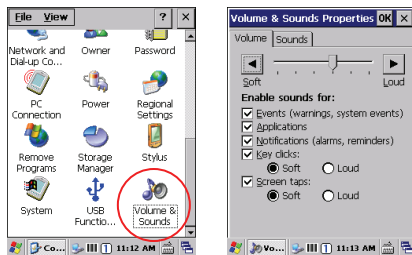


Or press [SF/Fn] on the keypad; press F1 for volume up or F2 for volume down.

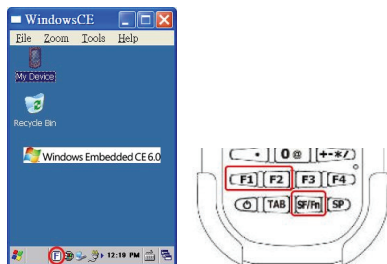

Reset


Using the Warm reset function:

Warm reset function allows you to return the device to the default settings, while not wiping all data from the memory. Insert a needle into the reset hole as shown and press down gently, to reset the device.

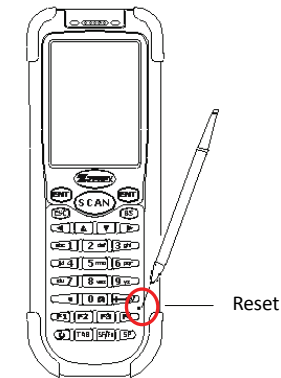

Using the Cold reset function:

Cool reset function allows you to return the device to the factory settings, while wiping all data from the memory. Press down and hold the power key for 8 seconds to cold reset the device.

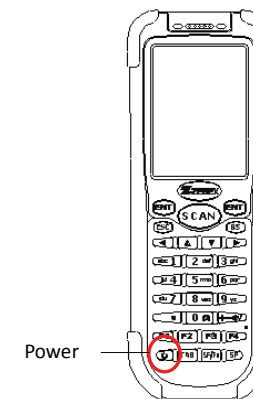

*Please visit the support section of our website <http://www.zebex.com/> to download the latest software and driver.