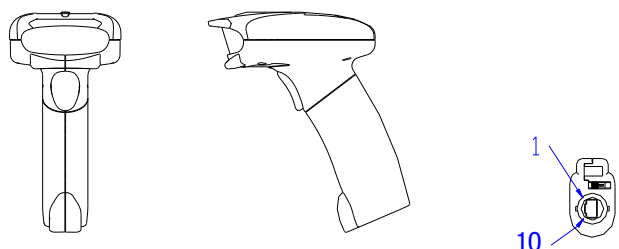




Z-3072 Handheld 2D Image Reader

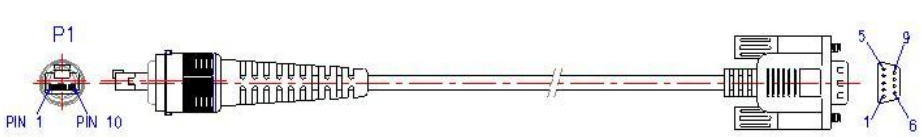

Standard Device

			PIN-OUT CONFIGURATION			
			RJ 1.	USB_ENABLE	RJ 2.	USB+
			RJ 3.	NC	RJ 4.	GND
			RJ 5.	CTS	RJ 6.	RXD
			RJ 7.	USB-	RJ 8.	+5V
			RJ 9.	RTS	RJ 10.	TXD
Barcode	P/N	Model Name	Remark			
	883-72SD00-000	Z-3072	White housing (device only, w/o cable)			
	883-72SD00-001	Z-3072 (B)	Black housing (device only, w/o cable)			

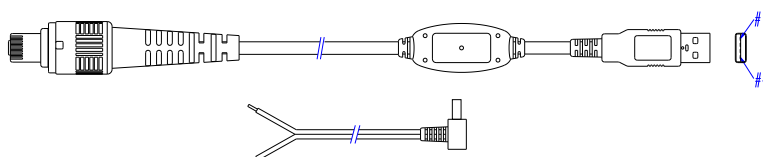

Standard Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include RS-232 and USB cable.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.

1. RS-232C Cable

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
		2	TX
		3	RX
		7	CTS
		8	RTS
5	GND		
Item Part No.:	171-1R4205-200		

2. USB Cable

		USB TYPE A CONNECTOR	FUNCTION
		1.	VCC
		2.	D-
		3.	D+
		4.	VSS
Item Part No.:	171-14U305-200		

Power Adapter

Z-3072 requires a minimum of 350mA at 5 VDC power. Please use 5V, 1A power adapter with USB interface when host can not provide efficient power. ZEBEX provides adapters of the following plug types:

