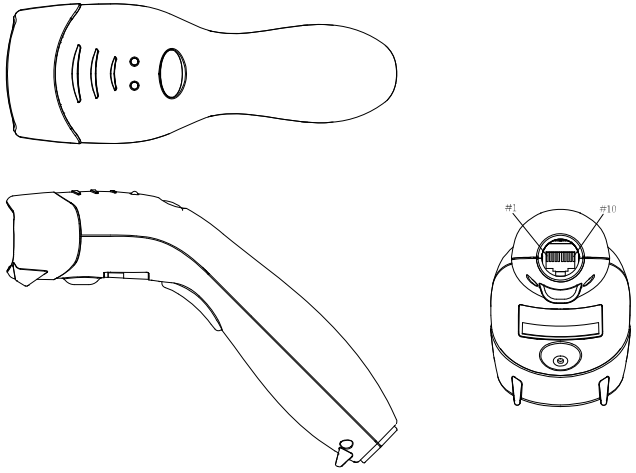


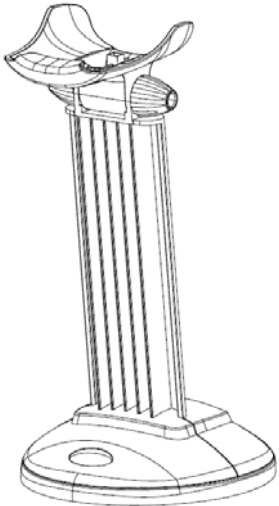
[Buyer's Guide]

Z-3152 Series Advanced Handheld 2D Image Reader

Standard Device

		PIN-OUT CONFIGURATION			
		RJ 1.	RTS	RJ 2.	USB+
		RJ 3.	USB-	RJ 4.	GND
		RJ 5.	CTS	RJ 6.	RXD
		RJ 7.	USB_ENABLE	RJ 8.	+5V
		RJ 9.	NC	RJ 10.	TXD

Optional Accessory

		
Description	Stand for Z-3X51HS, Z-3X52 Series	
Barcode	P/N	Remark
	883-51HL00-000	White Housing
	883-50HL00-001	Black Housing
	883-51HL00-0NB	White Housing w/o ZEBEX logo
	883-51HL00-0N1	Black Housing w/o ZEBEX logo

[Buyer's Guide]

Ordering Information

(Stand NOT included for standard package)

Z-3152SR (Standard Version)

Barcode	P/N	Model Name	Remark
	88H-52SRRP-000	Z-3152SR (R)	White housing w/RS232 cable (DTE pin-out)
	88H-52SRRP-001	Z-3152SR (R) (B)	Black housing w/RS232 cable (DTE pin-out)
	88H-52SRUB-000	Z-3152SR (U)	White housing w/USB cable
	88H-52SRUB-001	Z-3152SR (U) (B)	Black housing w/USB cable

Z-3152HD (High Density Version)


Barcode	P/N	Model Name	Remark
	88H-52HDRP-000	Z-3152HD (R)	White housing w/RS232 cable (DTE pin-out)
	88H-52HDRP-001	Z-3152HD (R) (B)	Black housing w/RS232 cable (DTE pin-out)
	88H-52HDUB-000	Z-3152HD (U)	White housing w/USB cable
	88H-52HDUB-001	Z-3152HD (U) (B)	Black housing w/USB cable

[Buyer's Guide]


Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include RS-232 and USB.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cables, given that customers provide detailed pin configurations. Please contact your sales representative to further discuss the minimum order quantity of the special cables.

1. RS-232C Communication Cable (DTE pin out)

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
Item Part No. 171-10R442-200		2	TX
		3	RX
		7	CTS
		8	RTS
		5	GND
		9	+5V Input

2. RS-232C Communication Cable (DCE pin out) (non-standard option)

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
Item Part No. 171-10R432-200 171-10R433-200	 	2	RX
		3	TX
		7	RTS
		8	CTS
		5	GND
		9	+5V Input






3. USB Cable

USB TYPE A		USB TYPE A CONNECTOR	FUNCTION
		1.	VCC
		2.	D-
		3.	D+
		4.	VSS
Item Part No.	171-14U302-200		
	171-14U303-200		



Power Adapter

Z-3152 requires a minimum of 280mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

UK Plug	US Plug	Australian Plug	European Plug	Korean Plug
				

* The figures are for reference only. The adaptor form factor is subject to change without prior notice.