






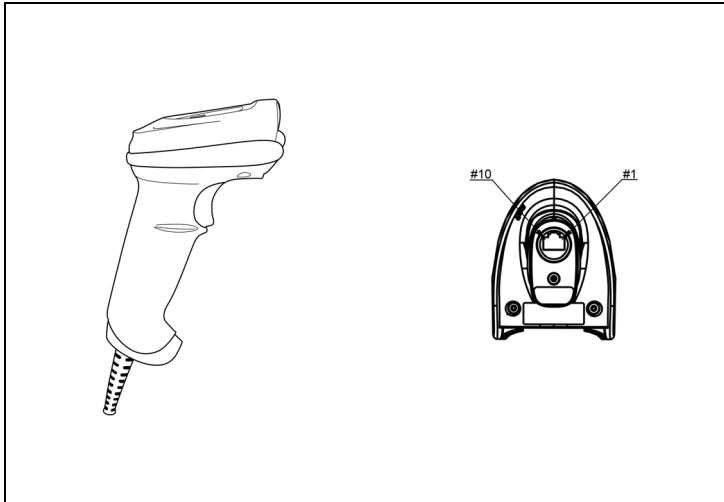


[Buyer's Guide]

Z-3172 Plus Handheld Gun Type 2D Imager

Standard Device

	PIN-OUT CONFIGURATION		
	MODULE JACK_PIN#	RS-232C	USB
	#1	RTS (TTL level)	N/C
	#2	N/C	USB_D+
	#3	N/C	USB_D-
	#4	Ground	Ground
	#5	CTS (TTL level)	N/C
	#6	RXD (TTL level)	N/C
	#7	N/C	N/C
	#8	N/C	USB 5V
#9	N/C	N/C	
#10	TXD(TTL level)	N/C	

Ordering Information

Barcode	P/N	Model Name	Remark
	88H-72PLRP-001	Z-3172 Plus (R) (B)	Gun Type 2D Image Handheld Scanner, black, RS232 Cable
	88H-72PLRP-A01	Z-3172 Plus (R) (B)	Gun Type 2D Image Handheld Scanner, black, RS232 Cable, AU adapter
	88H-72PLRP-E01	Z-3172 Plus (R) (B)	Gun Type 2D Image Handheld Scanner, black, RS232 Cable, EU adapter
	88H-72PLRP-K01	Z-3172 Plus (R) (B)	Gun Type 2D Image Handheld Scanner, black, RS232 Cable, UK adapter
	88H-72PLRP-U01	Z-3172 Plus (R) (B)	Gun Type 2D Image Handheld Scanner, black, RS232 Cable, US adapter
	88H-72PLUB-001	Z-3172 Plus (U) (B)	Gun Type 2D Image Handheld Scanner, black, USB Cable
	88H-72PLUB-0S1	Z-3172 Plus(U) (B)	Gun Type 2D Image Handheld Scanner, black, USB Cable + Stand

[Buyer's Guide]

Standard Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include RS-232 and USB.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.

1. RS-232C Communication Cable (DTE pin out)

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
		2	TX
		3	RX
		7	CTS
		8	RTS
		5	GND
		9	+5V Input
Item Part No.	171-10R442-200		

2. HID USB / Virtual COM USB / OPOS USB Interface with Detachable Cable Type A

		PIN-OUT CONFIGURATION	
		USB TYPE A CONNECTOR	FUNCTION
		1.	VCC
		2.	D-
		3.	D+
		4.	VSS
Item Part No.	171-10U303-200		
	171-10U302-200		

* Additional software or special firmware may be required for activating virtual COM or OPOS USB interface.

Optional Stand Selection

	88H-72ST00-001	Stand	Z-317X Series Stand
--	----------------	-------	---------------------

Power Adapter

Z-3172 Plus requires a minimum of 110mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

UK Plug	US Plug	Australian Plug	European Plug	Korean Plug

* The figures are for reference only. The adaptor form factor is subject to change without prior notice.