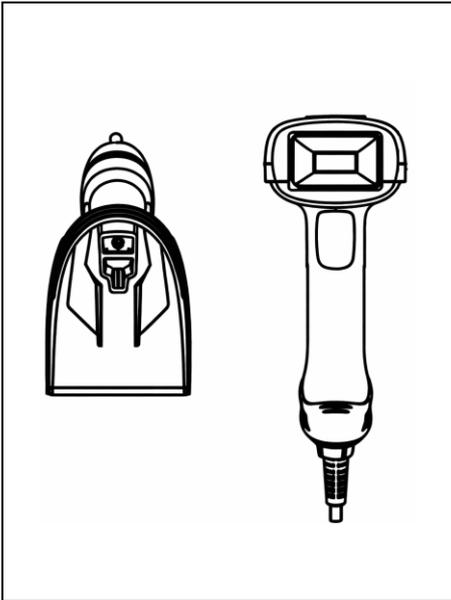


Z-3502 2D Image Handheld Scanner

Standard Device

		PIN-OUT CONFIGURATION			
		PIN	Signal Name	I/O	Description
	1	RTS	O	Require To Send	
	2	D+	I/O	USB D+ differential data signal	
	3	D-	I/O	USB D- differential data signal	
	4	GND	-	Ground: power and signal ground	
	5	CTS	I	Clear To Send	
	6	RXD	I	Input: TTL level 232 receive data	
	7	/			
	8	VIN	-	Power: supply voltage input	
	9	Shield GND	-	Shield Ground	
	10	TXD	O	Output: TTL level 232 transmit data	

Ordering Information

	88H-0500UB-001	Z-3502(U)	Black housing w/USB cable
	88H-0500RP-A01	Z-3502(R)	Black housing w/RS232 Cable w/AU Adaptor
	88H-0500RP-E01	Z-3502(R)	Black housing w/RS232 Cable w/EU Adaptor
	88H-0500RP-K01	Z-3502(R)	Black housing w/RS232 Cable w/UK Adaptor
	88H-0500RP-U01	Z-3502(R)	Black housing w/RS232 Cable w/US Adaptor