



[Buyer's Guide]

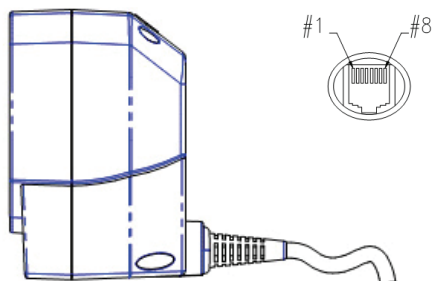





Z-6112 Series Hands-Free 2D Image Reader

Standard Device








PIN-OUT CONFIGURATION	
PIN	FUNCTION
1	DC +5V Input
2	USB_D-
3	RS-232_RTS
4	Ground
5	RS-232_TXD
6	RS-232_RXD
7	USB_D+
8	RS-232_CTS

Standard Accessory – Fixed Stand



Barcode	Model	Part No.	Remark
	Fixed Stand	886-10HL00-001	IBM Black Color

Optional Accessory –Adjustable Stand

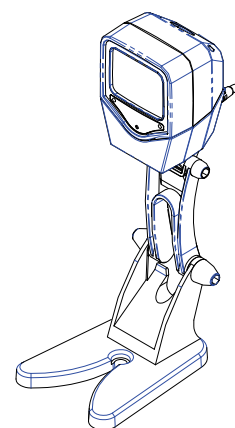

Barcode	Model	Part No.	Remark
	Adjustable Stand	886-10AH00-001	IBM Black Color

Ordering Information

(Fixed stand included for standard product)

Z-6112SR (Standard Version)

Barcode	P/N	Model Name	Remark
	88F-12SRRP-000	Z-6112SR (R)	White housing w/RS-232 cable (DTE pin-out)
	88F-12SRRP-001	Z-6112SR (R)(B)	Black housing w/RS-232 cable (DTE pin-out)
	88F-12SRUB-000	Z-6112SR (U)	White housing w/USB cable
	88F-12SRUB-001	Z-6112SR (U)(B)	Black housing w/USB cable
	88F-12SRUB-010	Z-6112SR(U)	2D Image Hands-Free Scanner USB Stand SR
	88F-12SRUB-011	Z-6112SR(U)(B)	2D Image Hands-Free Scanner Black USB Stand SR
	88F-12SRUB-0N1	2D Image Hands-Free Scanner	2D Image Hands-Free Scanner Black USB Holder SR No Brand
	88F-12SRUB-0NB	2D Image Hands-Free Scanner	2D Image Hands-Free Scanner USB Holder SR No Brand

[Buyer's Guide]


Z-6112HD (High Density Version)

Barcode	P/N	Model Name	Remark
	88F-12HDRP-000	Z-6112HD (R)	White housing w/RS-232 cable (DTE pin-out)
	88F-12HDRP-001	Z-6112HD (R)(B)	Black housing w/RS-232 cable (DTE pin-out)
	88F-12HDUB-000	Z-6112HD (U)	White housing w/USB cable
	88F-12HDUB-001	Z-6112HD (U)(B)	Black housing w/USB cable


Standard Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include RS-232 and USB.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cables, given that customers provide detailed pin configurations. Please contact your sales representative to further discuss the minimum order quantity of the special cables.

1. RS-232C Cable






<u>DTE PINOUT</u>		<u>PIN-OUT CONFIGURATION</u>	
		DB-9 (F)	FUNCTION
		2	TX
		3	RX
		7	CTS
		8	RTS
		5	GND
		9	+5V
Item Part No.	171-42R442-200		

2. USB Cable

		USB TYPE A CONNECTOR	FUNCTION
		1.	VCC
		2.	D-
		3.	D+
		4.	VSS
Item Part No.	171-42U303-200		
	171-42U302-200		

Power Adapter

Z-6112 normally requires 280mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

UK Plug	US Plug	Australian Plug	European Plug	Korean Plug
				

* The figures are for reference only. The adaptor form factor is subject to change without prior notice.